
CP7782TL-6

1" Torque Limited Impact Wrench



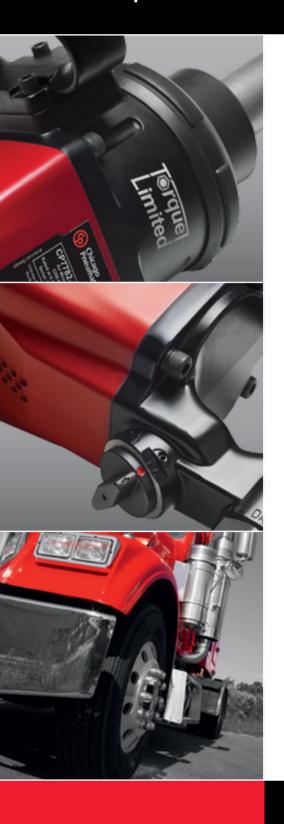

The first and only 1" torque limited impact wrench


To make your life easier, we leveraged our expertise in impact wrenches by developing the CP7782TL-6 to prevent from overtightening bolts.

People.
Passion.
Performance.



CP7782TL-6

The first and only 1" torque limited impact wrench

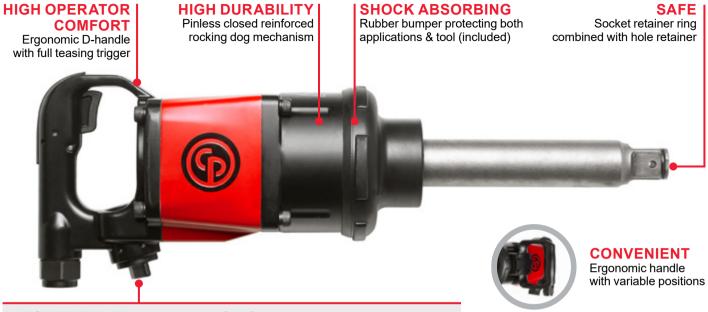

POWERFUL IN REVERSE

1920 ft.lbs / 2600 Nm max torque



max torque 3 setting positions

TORQUE LIMITED

1 position torque limited in forward around **370 ft.lbs / 500 Nm**





DIMENSIONS

Length						
in.	mm					
20.11	510.8					



Model	Part#	Square Drive	Anvil	Socket Retainer	Free Speed	Max Torque		Torque Limited		Tool Weight		Air Cons. @ Load		Sound Pressure	Sound Power	Vibration
		Dilve	Dilve	rtetairiei	RPM	ft-lbs.	Nm	ft-lbs.	Nm	lbs.	kg	cfm	l/s	dB(A)	dB(A)	m/s²(k)
CP7782TL-6	894 107 7827	1"	6"	Ring & hole	5200	1920	2600	≈370	≈500	25.55	11.6	40.7	19.2	100	111	7.8 (1.8)

Hose int. 1/2" (10 mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check tool documentation.

1" SQUARE DRIVE IMPACT SOCKET SETS

Model	Part#	Description [sizes]				
Metric sets (mm)						
SS818	894 016 4476	8PC - Standard set [27, 30, 32, 33, 35, 36, 38 & 41 mm]				
SS8107WS	894 016 7877	7PC - Wheel Service Set [Deep: 27, 33, 35, 36, 38, 41 mm Square: 17, 21 mm]				
SS814D	894 016 6016	4PC - Deep set [27, 32, 33 & 36 mm]				
SAE (in.) & Metric (mm) sets						
SS8205WS	894 016 6943	5PC - [Deep: 33 mm, 1-1/2" Thin wall: 1-1/6", 1-1/4" Square: 13/6"]				
SS8210HDW	894 016 6939	10PC - [Deep: 33 mm, 1", 1-3/6", 1-3/4" Thin wall deep: 1-3/6", 1-1/6", 1-1/4" Square: 13/6", 15/6" Controlled depth: 1-1/2"]				

More references available in the CP Socket Catalog

TUNE-UP KIT

Model Tune-up kit part number

CP7782TL-6 894 016 9847



Discover more tire changing solutions in our tireshop industry brochure.

thttp://qr.cp.com/ Tire-changingbrochure

For more information, please contact your CP partner:



www.cp.com