

# CP1114R Series

Industrial Reversible Drills



*4 models from 500 to 4000 RPM,  
with  $\frac{3}{8}$ " &  $\frac{1}{2}$ " chuck*

- ✓ Ergonomics
- ✓ Industrial durability
- ✓ Versatility

People.  
Passion.  
Performance.



Chicago  
Pneumatic

# CP1114R Industrial Reversible Drills

## VERSATILE


- Forward/Reverse switch
- Adjustable side handle

## POWERFUL & EFFICIENT

0.54 HP / 400 W

## DURABLE & ACCURATE

- Up to 800 hours service interval
- Triple full caged planetary gears
- JACOBS Industrial Chuck

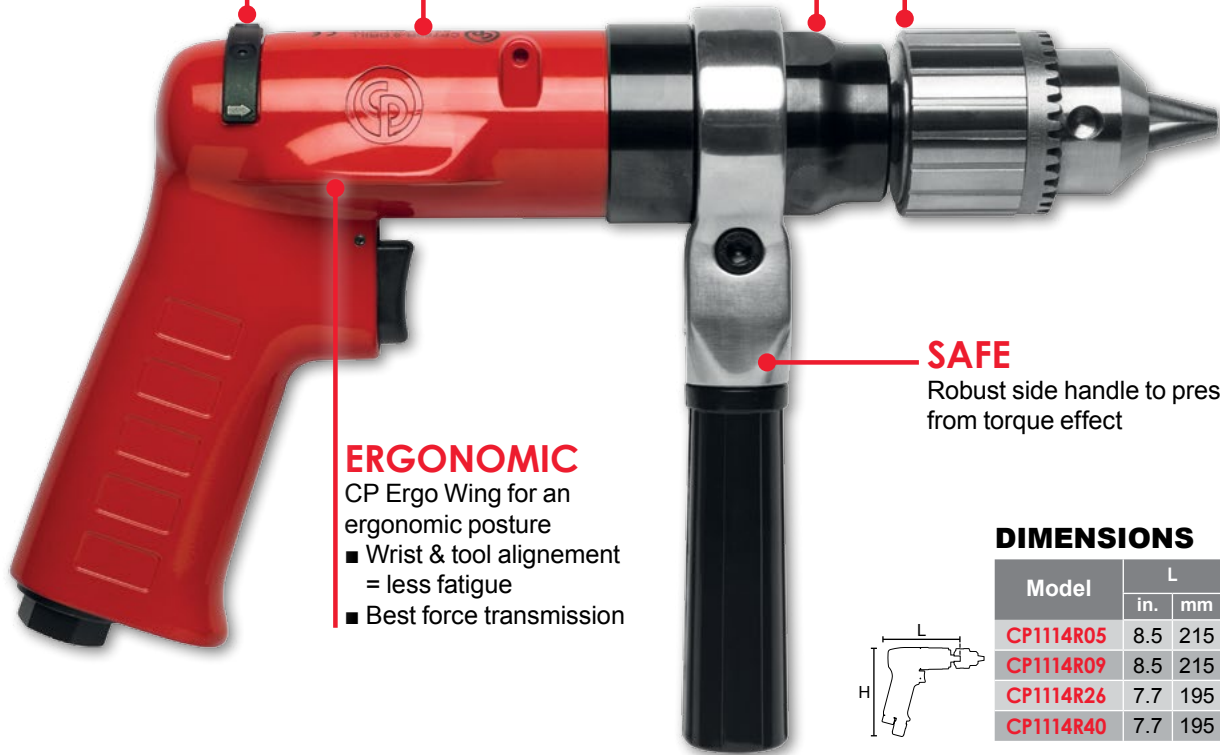

## ERGONOMIC


- CP Ergo Wing for an ergonomic posture
- Wrist & tool alignment = less fatigue
- Best force transmission

## SAFE

Robust side handle to preserve from torque effect

## DIMENSIONS

| Model     | L   |     | H   |     |
|-----------|-----|-----|-----|-----|
|           | in. | mm  | in. | mm  |
| CP1114R05 | 8.5 | 215 | 5.5 | 140 |
| CP1114R09 | 8.5 | 215 | 5.5 | 140 |
| CP1114R26 | 7.7 | 195 | 5.5 | 140 |
| CP1114R40 | 7.7 | 195 | 5.5 | 140 |



| Model     | Part Number  | Free Speed | Power |     | Chuck Capacity |    | Spindle  | Stall Torque |      | Net Weight |     | Length |     | Air Cons. @Load |     | Vibration Level - a (k) | Sound Press. | Sound Power | Air Inlet |
|-----------|--------------|------------|-------|-----|----------------|----|----------|--------------|------|------------|-----|--------|-----|-----------------|-----|-------------------------|--------------|-------------|-----------|
|           |              | rpm        | hp    | W   | in.            | mm | in       | ft.lb        | Nm   | lb         | kg  | in.    | mm  | cfm             | l/s | (m/s <sup>2</sup> )     | dB(A)        |             | in.       |
| CP1114R05 | 615 158 0310 | 500        | 0.5   | 410 | 1/2            | 13 | 3/8 - 24 | 18.6         | 25.2 | 2.8        | 1.3 | 8.5    | 215 | 25.5            | 12  | <2.6 (1.1)              | 82           | 93          | 1/4       |
| CP1114R09 | 615 158 0320 | 900        | 0.5   | 410 | 1/2            | 13 | 3/8 - 24 | 12.4         | 16.8 | 2.8        | 1.3 | 8.5    | 215 | 25.5            | 12  | 3.6 (1.5)               | 82           | 93          | 1/4       |
| CP1114R26 | 615 158 0330 | 2,600      | 0.5   | 410 | 3/8            | 10 | 3/8 - 24 | 4.0          | 5.5  | 2.4        | 1.1 | 7.7    | 195 | 25.5            | 12  | <2.5 (1.2)              | 82           | 93          | 1/4       |
| CP1114R40 | 615 158 0340 | 4,000      | 0.5   | 410 | 3/8            | 10 | 3/8 - 24 | 1.2          | 1.7  | 2.4        | 1.1 | 7.7    | 195 | 25.5            | 12  | <2.5 (0.6)              | 82           | 93          | 1/4       |

Hose int. 3/8" (10 mm) - @90 PSI (@6.3 Bar)

Vibration level according to ISO 28927. Sound pressure and sound power according to ISO 15744. Listed specifications are for reference only. Please check tool documentation.

## TUNE-UP KIT

| Model  | Tune-up kit part number |
|--|-------------------------|
| CP1114R05<br>CP1114R09<br>CP1114R26<br>CP1114R40 | 894 017 4059            |

## CHUCKS - JACOBS all models: thread 3/8" - 24mm

| Model          | Part #       | Description                              |
|----------------|--------------|--|
| CP1114R05 & 09 | 894 017 4027 | Standard - 1/2" (13mm) chuck & key       |
| CP1114R26 & 40 | 894 017 4028 | Standard - 3/8" (10mm) chuck & key       |
| CP1114R05 & 09 | S066095      | Top durability - 1/2" (13mm) chuck & key |
| CP1114R05 & 09 | 205 050 2073 | Optional keyless - 1/2" (13mm) chuck     |
| CP1114R26 & 40 | 205 050 2063 | Optional keyless - 3/8" (10mm) chuck     |

DISCOVER MORE INDUSTRIAL DRILLS AND ACCESSORIES

Visit our website [www.cp.com](http://www.cp.com)

For more information, please contact your CP partner:



[www.cp.com](http://www.cp.com)